




109 Kero Road, Carlstadt, NJ 07072
 Tel: 718-599-5112 Fax: 718-387-7941
 www.doorstopny.com

PRODUCT DATA SHEET

FPC5-20 MIN: Standard Particleboard
 Core Door (5-Ply)

SPECIFICATIONS

Wood Rail

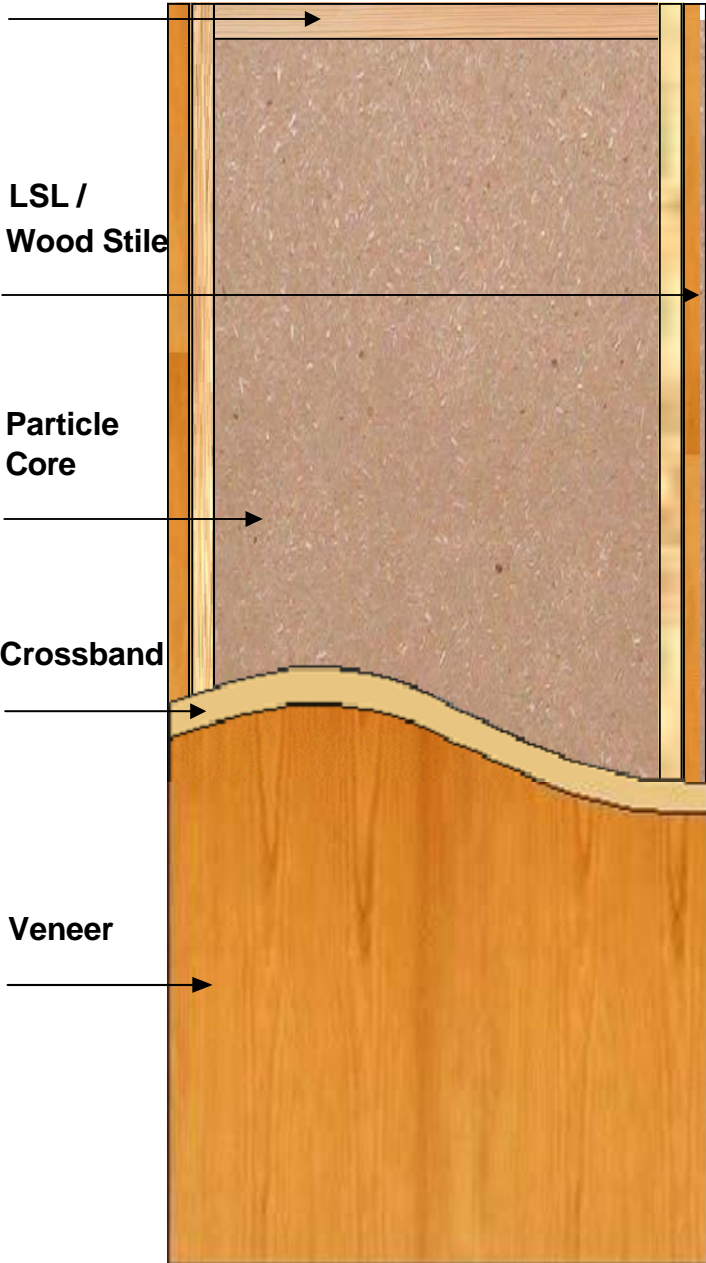

Maximum Size: 48" wide x 96" high. Pairs and doors above 96" high require 45minute construction. Call office for information

Transoms: Call office for details.

Thickness: 1.375", 1.75", 2.0" and 2.25"

Core: Particleboard LD-1 or LD-2, which complies with ANSIA208.1.

Veneers: Many species of natural wood veneer are available. WDMA 'A' grade, book & running match are standard. Primed Hardboard, Primed MDF, MDO and Decorative Plastic Laminate are also available.

Stiles: 1.25" softwood stiles are standard. Matching hardwood stiles with LSL backer (used for rigidity) are also available. All dimensions prior to factory trimming and prefitting.

Rails: Solid 1.25 wood rail or extra blocking upon request. All Dimensions prior to factory trimming and prefitting

Finish: TR-6 UV clear, custom stain to match color, or primed where applicable.

Adhesives: PVA meets or exceeds WDMA I.S.1-A for Type 1 flush wood door adhesive.

Lites: Wood lip or flush molding wood visions and metal visions frames with 1/4" glass (all types).

Blocking: Top rail, bottom rail, stiles, and special blocking for special hardware is available.

Machining: Bevel, hinge and lock, mortise lock, cardlock, pivot and other hardware preps using state of the art CNC equipment.

Fire Rating: 20-Minute Intertek Testing Services / Warnock Hersey Listing
 Neutral Pressure

Standards: Meets ANSI, WDMAI.S. 1-A and AWI

Environmental / LEED Credit Contributions (Optional)

MR 4: Recycled Content

MR 5: Regional Materials

MR 6: Rapidly Renewable Materials (Bamboo Veneer Only)

MR 7: Certified Wood (FSC Pure, FSC % and FSC CW)

IEQ 4.4: Low Emitting Materials / No Added Urea Formaldehyde



Intertek